


STANDARD DRAWING NO.

LSK-0061 APPROVED BY: LAJ DRAWN BY: KLY ISSUE DATE: 5/01


STEEL PIPE CATTLE GUARD GRID

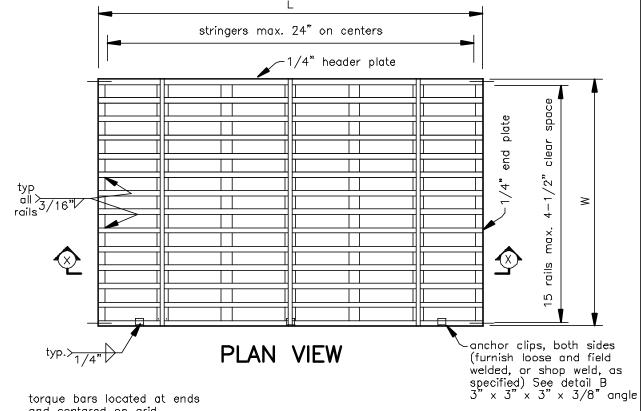





ANCHOR CLIP - DETAIL B




DIMENSIONS

 $L = \underline{\hspace{1cm}}(ft)$ $W = \underline{\hspace{1cm}}(ft)$ H = _____(ft) $A = \underline{\hspace{1cm}}(ft)$ $\mathsf{B} \; = \; \underline{\hspace{1cm}} (\mathsf{ft})$ $C = \underline{\hspace{1cm}}(ft)$

 $D = \underline{\hspace{1cm}} (ft)$

Rail, cold-fromed from ASTM A242 steel plate 7 guage min. thickness



Rail, cold-fromed

from ASTM A500

CROSS SECTION OF RAIL

Drawing not to scale. Standardized drawing must be adapted to the specific site.

	JOB CLASS	Date
		Designed
	CAD FILE NO.	<u> </u>
	LSK-0061,DWG	Drawn
	SHEET OF	Checked
U.S.D.A. NATURAL RESOURCES CONSERVATION	N SERVICE	Approved